

EtherCAT®



ECAT-2061

EtherCAT Slave I/O Module with Isolated 16-ch Relay DO

Features

- On the fly processing: EtherCAT
- Powerful MCU handles efficient network traffic
- 2 x RJ-45 bus interface
- Distance between stations up to 100 m (100 BASE-TX)
- Support daisy chain connection
- EtherCAT conformance test tool verified
- Removable terminal block connector
- LED indicators for the input status
- Built-In Outputs: 16 Relay DO
- RoHS compliant
- ESD Protection 4 KV Contact for each channel



Introduction


The ECAT-2061 is an industrial slave I/O module built in 16 relay outputs. It is equipped with the EtherCAT* protocol and installed by daisy chain connection that provides a more scalable system with fewer wires. Users can obtain the input and output status not only via the process data but also from its LED indicators. The ECAT-2061 has passed and verified by the conformance test tool, therefore eligible EtherCAT Master or configurator can manipulate it simply and implement your various applications easily.

* EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.


Hardware Specifications

| Model | | ECAT-2061 |
|---------------------------------|---------------------------|--|
| Digital Input | | |
| Channels | | 16 |
| Type | | Form A (SPST-NO) |
| Contact Rating (Resistive Load) | | 3 A @ 250 VAC (47 ~ 63 Hz) 3 A @ 30 VDC |
| Operate Time | | 10 ms (Max.) |
| Release Time | | 5 ms (Max.) |
| Insulation Resistance | | 1,000 MΩs at 500 Vdc |
| Dielectric Strength | Between Open Contact | 1000 VAC (1 min.) |
| | Between Coil and Contacts | 3000 VAC (1 min.) |
| Endurance | Mechanical | 2 x 10 ⁷ ops |
| | Electrical | 1 x 10 ⁵ ops |
| Power On Value | | Yes |
| Safe Value | | Yes |
| Photo-Isolation | | 3000 Vdc |
| Communication Interface | | |
| Connector | | 2 x RJ-45 |
| Protocol | | EtherCAT |
| Distance between Stations | | Max. 100 m (100 BASE-TX) |
| Data Transfer Medium | | Ethernet/EtherCAT Cable (Min. CAT 5), Shielded |
| EMS Protection | | |
| ESD (IEC 61000-4-2) | | ±4 kV Contact for Each Terminal |
| EFT (IEC 61000-4-4) | | Signal: 1 KV Class A; Power: 1 KV Class A |
| Surge (IEC 61000-4-5) | | 1 KV Class A |
| Power | | |
| Input Voltage Range | | 10 ~ 30 Vdc |
| Power Consumption | | 4 W Max. |
| Mechanical | | |
| Dimensions (H x W x D) | | 140 mm x 112.2 mm x 31 mm |
| Installation | | DIN-Rail Mounting |
| Case Material | | UL 94V-0 Housing |
| Environment | | |
| Operating Temperature | | -25 ~ +75°C |
| Storage Temperature | | -30 ~ +80°C |
| Relative Humidity | | 10 ~ 90% RH, Non-condensing |

Applications

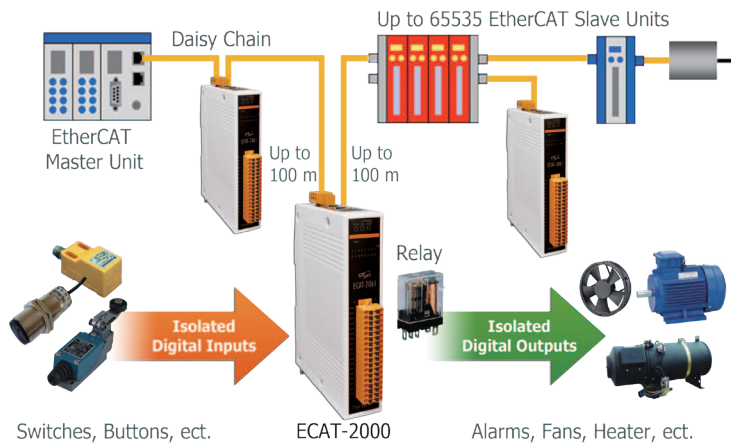


Pin Assignments

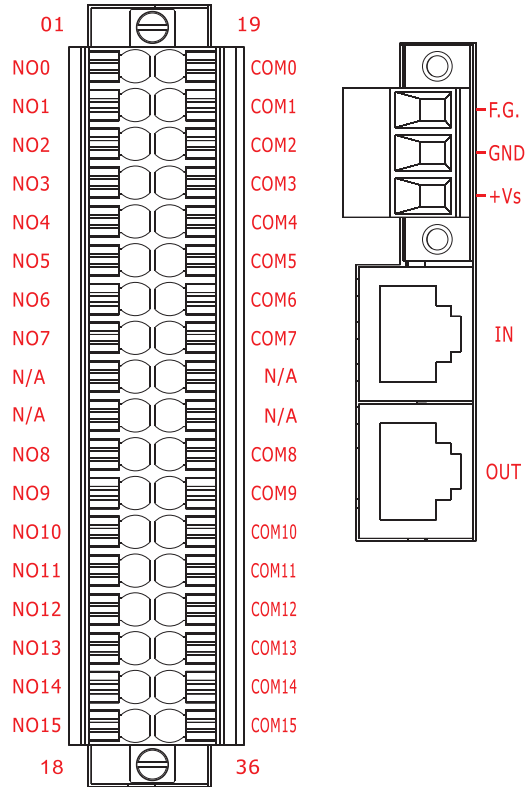

Wire Connections

| Output Type | ON State Readback as 1 | OFF State Readback as 0 |
|--------------|---------------------------|----------------------------|
| Relay Output | | |

Dimensions (Units: mm)

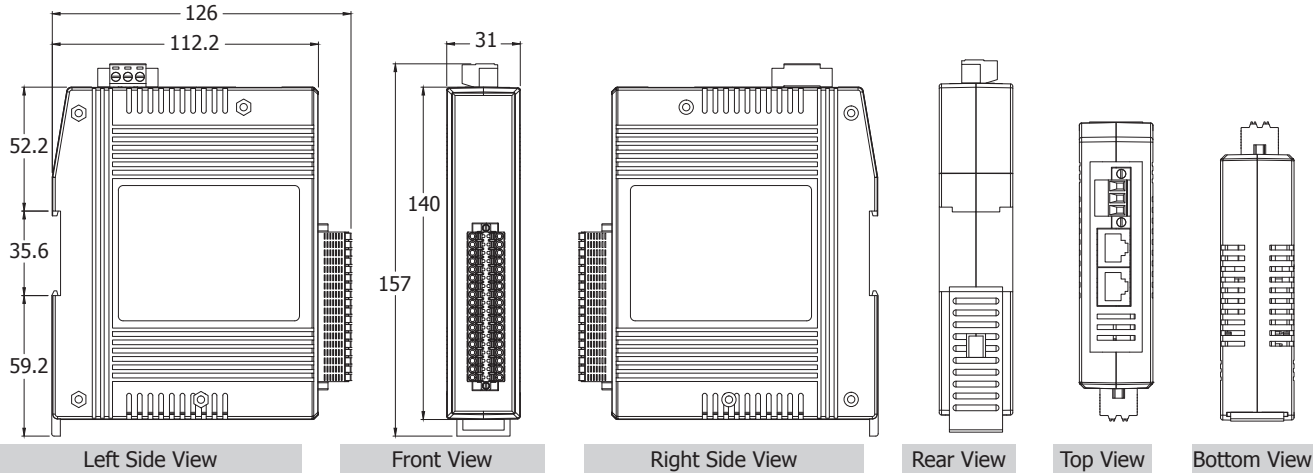

Ordering Information

| | |
|--------------|---|
| ECAT-2061 CR | EtherCAT Slave I/O Module with Isolated 16-ch Relay DO (RoHS) |
|--------------|---|