

# FSM-510G-4F NEW

6-Port 10/100/1000 Base-T + 4 SFP Port L2 Managed Switch

# FSM-510G-2F NEW

8-port 10/100/1000Base-T + 2 (100/1G) SFP L2 Plus Managed Switch

FSM-510G-2F



FSM-510G-4F



## Features ▶▶▶

- IEEE 802.3ab 1000BASE-T Gigabit Ethernet
- Network redundant Ring fail-over protection (< 20 ms)
- Multicast/Broadcast/Flooding Storm Control
- L2+ features provide better manageability, security, QoS, and performance
- Multicasting support IGMP v1/v2, proxy & snooping

## Introduction

FSM-510G-4F is a L2 Managed Switch that meets all IEEE 802.3ab/u/x/z Gigabit, Gigabit Ethernet and Ethernet specifications. It provides 6 gigabit Ethernet ports (10/100/1000 Mbps TP) 4 SFP ports.


The switch can be managed through RS-232 serial port via direct connection, or through Ethernet port using Telnet or Web-Based management unit, associated with SNMP agent. With the SNMP agent, the network administrator can logon the switch to monitor, configure and control each port activity in a friendly way. The overall network management is enhanced and the network efficiency is also improved to accommodate high bandwidth applications. In addition, the switch features comprehensive and useful function such as DHCP Option 82, QoS (Quality of Service), Spanning Tree, VLAN, Port Trunking, Bandwidth Control, Port Security, SNMP/RMON.

## Specifications

Models	FSM-510G-4F	FSM-510G-2F
<b>Technology</b>		
<b>Standards</b>	Port Mirroring helps supervisor monitoring network	
	IEEE 802.1Q tag-based VLAN for performance	
	IEEE 802.1X Access Control improve network security	
	IEEE 802.1D Compatible, IEEE802.1w Rapid Spanning Tree & IEEE802.1s Multiple Spanning Tree	
	IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper)	
	IEEE 802.3z Gigabit Ethernet (fiber) ANSI/IEEE 802.3	
	Unknown Unicast/Broadcast/Multicast storm control	
	IP-MAC-Port binding for LAN security	
	QCL Based on Application traffic for QoS and rate limitation management	
	Supports DHCP snooping (DHCP option 82)	
	ACL Based on Ethernet Type/ARP/IPv4 for packets permit or deny, rate limitation and port copy	
	Supports "power saving" for Green Ethernet requirement	
	Supports LLDP (Link Layer Discovery Protocol) provides a standards-based method for enabling switches to advertise themselves.	

Models	FSM-510G-4F		FSM-510G-2F
Technology			
MAC Addresses	8 K		
Processing Type	Store & forward		
Protocol	VLAN, QoS, Port Trunk, SMTP, TELNET, SNMP, IGMP, IEEE802.1X, LLDP		
Interface			
RJ-45 Ports	6-port 10/100/1000 Base-TX auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection	8-port 10/100/1000 Base-TX auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection	
SFP	4-port 100/1000 Mbps SFP Fiber Module slots	2-port 100/1000 Mbps SFP Fiber Module slots	
LED Indicators	POWER, ALARM , TP Port LED		
Ethernet Isolation	1500 V <sub>rms</sub> 1 minute		
Serial Port	RS-232 (TxD, RxD and GND); Non-isolated		
Frame Ground for EMS Protection	EMS Requirements: IEC-61000-4-2, IEC-61000-4-3, IEC-61000-4-4, IEC-61000-4-5, IEC-61000-4-6		
Power			
Input Voltage Range	+12 V <sub>DC</sub> ~ +48 V <sub>DC</sub>		
Power Consumption	10.5 W		
Frame Ground for EMS Protection	Yes		
Mechanical			
Casing	Metal		
Environmental Rating	IP30 Protection		
Dimensions (W x L x H) (Units: mm)	57 mm x 121 mm x 164 mm		
Installation	DIN-Rail Mounting or Wall mounting		
Environmental			
Operating Temperature	-40 °C ~ +75 °C		
Storage Temperature	-40 °C ~ +85 °C		
Ambient Relative Humidity	5% ~ 95% RH, non-condensing		

### Dimensions (Units: mm)

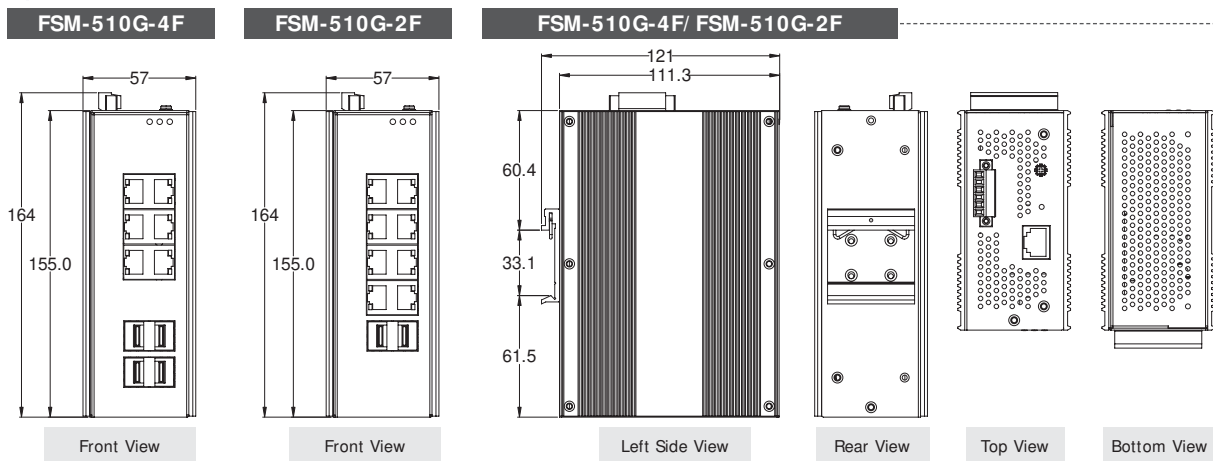

### Ordering Information

FSM-510G-4F CR	6-port 10/100/1000Base-T + 4 (100/1G) SFP L2 Plus Managed Switch (RoHS)
FSM-510G-2F CR	8-port 10/100/1000Base-T + 2 (100/1G) SFP L2 Plus Managed Switch (RoHS)

### Accessories

	SFP-1G85M-SX	Multi-mode 850 nm, 0.5 km SFP module
	SFP-1G13M-SX2	Multi-mode 1310 nm, 2 km SFP module
	SFP-1G13S-LX	Single-mode 1310 nm, 10 km SFP module
	SFP-1G13S-LX20	Single-mode 1310 nm, 20 km SFP module
	SFP-1G13S-LHX	Single-mode 1310 nm, 40 km SFP module
	SFP-1G15S-XD	Single-mode 1550 nm, 60 km SFP module