



RoHS compliant

Industrial Wireless Access Point


■ ■ AW5500

- Designed for 802.11a/b/g/n networks
- Operating temperature: -10°C ~ 60°C
- Web server/Utility configuration
- Upgrade via Device View or Web server
- 5 GHz frequency support to reduce interference on 2.4 GHz with other wireless devices
- Client isolation
- Different operating modes and topology options (WDS Bridge and AP Client)
- FCC (United States), ETSI (Europe), and NCC (Taiwan) certified wireless equipment


Suitable in a wide array of applications, the new AW5500 is able to withstand harsh conditions typically found in the industry.

AW5500 is also design thinking on your security, state of the art encryption as well as having the ability to create a virtual network among wireless clients; this level of communication between clients can be easily and intuitively controlled using this option, imposing restrictions on data and excluding malware at the same time. AW5500 embodies a strong wireless network manager that will surely deliver optimum performance in your network.


Front and Left Side View

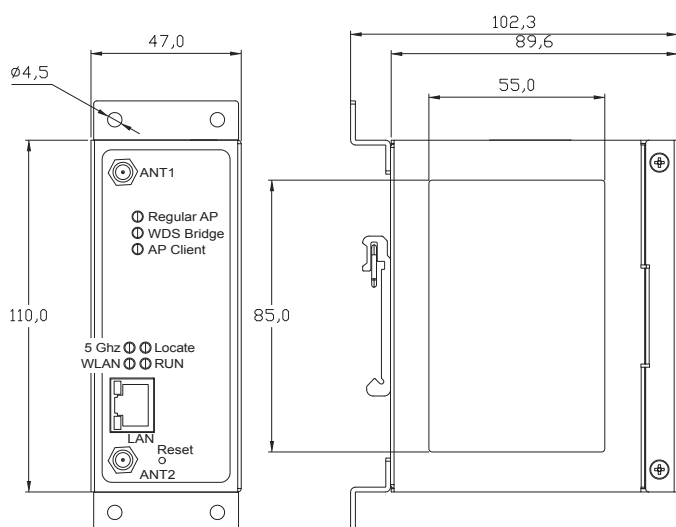

Back and Right Side View

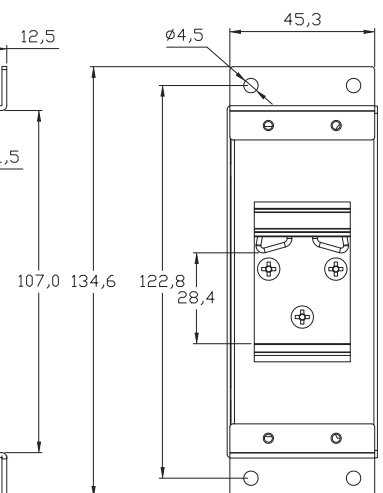

Top and Bottom View

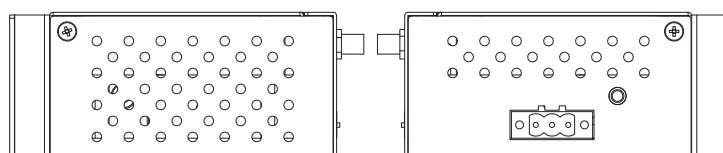

Specifications

Power Characteristics

Input Voltage	9VDC-48VDC
Input Current(9VDC)	0.65A
Power Consumption	Approx. 5.85W (max)
Reverse Polarity Protection	Yes
Connection	3-pin Lockable Terminal Block

Mechanicals

Dimensions	47 * 110 * 90 mm
Installation	DIN-Rail, wall mount (optional kit)
Reset Button	Yes

Environmental Limits

Operating Temperature	-10°C ~ 60°C (14°F ~ 140°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 ~ 95% RH, (non-condensing)

Hardware Characteristics

Watchdog	Hardware built-in
Ethernet Switch & PHY	IEEE802.3ab 1000 Base-T

Software Features

Operation Modes	AP, WDS Hybrid, AP Client
Wireless Security	WEP, WPA, WPA2, TKIP, AES, 802.1x
Network Security	Client Isolation, Firewall / Filtering, Turn off Radio
Alerts Events	E-mail / SNMP Trap
Supported Protocol	ICMP, TCP, UDP, DHCP Server/Client, DNS, SNMP, NTP, SMTP, HTTP, IPv4, 802.1x, RADIUS, STP/RSTP

Warranty

5 years

Regulatory Requirements

EMS	EN55032, EN55024
EMC	EN 301489-1/17 (Class A), FCC 15 Subpart B (Class A), CNS 13438
Radio	FCC 15 Subpart C, FCC 15 Subpart E, EN 301893, EN 300328, NCC LP00002

Test	Item		Value	Level
EN61000-4-2	ESD	Contact Discharge	±8KV	4
		Air Discharge	±15KV	4
EN61000-4-3	RS	Radiated(Enclosure)	10(V/m)	3
EN61000-4-4	EFT	AC Powe Port	±2.0 KV	3
		LAN Port	±2.0 KV	4
EN61000-4-5	Surge	AC Powe Port	Line-to-Line±1.0 KV	3
		AC Powe Port	Line-to-Earth±2.0 KV	3
		LAN Port	Line-to-Earth±2.0 KV	3
EN61000-4-6	CS	Conducted(Enclosure)	10 V rms	3
EN61000-4-8	PFMF	(Enclosure)	10(A/m)	3

Safety	UL60950-1/CB, EN60950-1, CNS 14336
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6
MTBF	22 years (MIL-HDBK-217F)
RoHS	Yes

Wireless Characteristics

Wireless PCI-e Module	Atheros AR9382
Tx / Rx	2T2R MIMO (2x2 with MCS 0-15)
Standard Conformance	802.11a, 802.11b, 802.11g, and 802.11n

Operating Frequency							
	2.4Ghz		5Ghz				
United States (FCC)	2412-2462(20Mhz)/2422-2452(40Mhz)		5180-5240, 5745-5825(20Mhz)/5190-5230, 5755-5795(40Mhz)				
Europe (ETSI)	2412-2472(20Mhz)/2422-2462(40Mhz)		5180-5240(20Mhz)/5190-5230(40Mhz)				
Taiwan (NCC)	2412-2462(20Mhz)/2422-2452(40Mhz)		5280-5320, 5745-5825(20Mhz)/5310, 5755-5795(40Mhz)				
Data Rate							
802.11a	6, 9, 12, 18, 24, 36, 48,54Mbps						
802.11b	1, 2, 5.5 and 11Mbps						
802.11g	6, 9, 12, 18, 24, 36, 48, 54Mbps						
802.11n	20MHz bandwidth: 1Nss: 65Mbps @ 800GI, 72.2Mbps @ 400GI (Max.) / 2Nss: 130Mbps @ 800GI, 144.4Mbps @ 400GI (Max.) 40MHz bandwidth: 1Nss: 135Mbps @ 800GI, 150Mbps @ 400GI (Max.) / 2Nss: 270Mbps @ 800GI, 300Mbps @ 400GI (Max.)						
Antenna (5GHz)							
Gain	5 dBi						
Connector	Dual SMA(R) Female						
Output Power (5GHz)							
802.11a	+15dBm @ 6, 9, 12, 18, 24Mbps / +15dBm @ 36Mbps / +14dBm @ 48Mbps / +12dBm @ 54Mbps						
802.11n 5GHz/HT20	+15dBm @ MCS 0/8 +15dBm @ MCS 2/10	+15dBm @ MCS 4/12 +9 - 12dBm @ MCS 6/14	+15dBm @ MCS 1/9 +15dBm @ MCS 3/11	+11 - 14dBm @ MCS 5/13 +7 - 10dBm @ MCS 7/15			
802.11n 5GHz/HT40	+14dBm @ MCS 0/8 +14dBm @ MCS 4/12	+14dBm @ MCS 1/9 +10– 13dBm @ MCS 5/13	+14dBm @ MCS 2/10 +8 – 11dBm @ MCS 6/14	+14dBm @ MCS 3/11 +6 – 9dBm @ MCS 7/15			
Antenna (2.4GHz)							
Gain	3 dBi						
Connector	Dual SMA(R) Female						
Output Power (2.4GHz)							
802.11b	+14dBm						
802.11g	+17dBm @ 6, 9, 12,18,24Mbps / +17dBm @ 36Mbps / +16dBm @ 48Mbps / +16dBm @ 54Mbps						
802.11n 2.4GHz/HT20	+16dBm @ MCS 0/8 +16dBm @ MCS 2/10	+16dBm @ MCS 4/12 +16dBm @ MCS 6/14	+16dBm @ MCS 1/9 +16dBm @ MCS 3/11	+16dBm @ MCS 5/13 +15dBm @ MCS 7/15			
802.11n 2.4GHz/HT40	+15dBm @ MCS 0/8 +15dBm @ MCS 2/10	+15dBm @ MCS 4/12 +15dBm @ MCS 6/14	+15dBm @ MCS 1/9 +15dBm @ MCS 3/11	+15dBm @ MCS 5/13 +14dBm @ MCS 7/15			
Receiver Sensitivity							
	Data Rate	IEEE Spec(1 Rx dBm)	Typical/Maximum(2Rx dBm)		Data Rate	IEEE Spec(1 Rx dBm)	Typical/Maximum(2Rx dBm)
802.11a	6M	-82	-95/-85	802.11a/n HT40	MCS0	-79	-92/-82
	9M	-81	-94/-84		MCS1	-76	-90/-79
	12M	-79	-93/+82		MCS2	-74	-87/-77
	18M	-77	-90/-80		MCS3	-71	-84/-74
	24M	-74	-88/-77		MCS4	-67	-80/-70
	36M	-70	-84/-73		MCS5	-63	-76/-66
	48M	-66	-82/-69		MCS6	-62	-74/-65
	54M	-65	-81/-68		MCS7	-61	-72/-64
802.11b	1M	not specified	-98/-85	802.11b/g/n HT20	MCS0	-82	-95/-85
	5.5M	not specified	-98/-85		MCS1	-79	-94/-82
	11M	not specified	-94/-85		MCS2	-77	-92/-80
802.11g	6M	-82	-96/-85	802.11b/g/n HT40	MCS3	-74	-89/-77
	9M	-81	-96/-84		MCS4	-70	-86/-73
	12M	-79	-95/-82		MCS5	-66	-82/-69
	18M	-77	-93/-80		MCS6	-65	-80/-68
	24M	-74	-90/-77		MCS7	-64	-78/-67
	36M	-70	-87/-73		MCS0	-79	-92/-82
	48M	-66	-83/-69		MCS1	-76	-92/-79
	54M	-65	-82/-68		MCS2	-74	-89/-77
802.11a/n HT20	MCS0	-82	-94/-85		MCS3	-71	-86/-74
	MCS1	-79	-92/-82		MCS4	-67	-83/-70
	MCS2	-77	-90/-80		MCS5	-63	-77/-66
	MCS3	-74	-87/-77		MCS6	-62	-76/-65
	MCS4	-70	-84/-73		MCS7	-61	-75/-64
	MCS5	-66	-79/-69				
	MCS6	-65	-78/-68				

Ordering Information

AW5500

P/N:1P1AW550000001G

Industrial Wireless Access Point

Optional Accessories

UN315-1212 (US-Y) Power Adapter

P/N: 50500151120003G

Y-Type power adaptor, 100-240VAC input, 1.25A @ 12VDC output, US plug LV6

UNE315-1212 (EU-Y) Power Adapter

P/N: 50500151120013G

Y-Type power adapter, 100~240VAC input, 1.25A @ 12VDC output, EU plug, LV6

UN315-2465 (US)

P/N: 50500161240002G

Y-Type power adapter, 100~240VAC input, 0.65A @ 24VDC output, US plug, LV6

UNE315-2465 (EU)

P/N: 50500161240012G

Y-Type power adapter, 100~240VAC input, 0.65A @ 24VDC output, EU plug, LV6

Atop Technologies, Inc.

TEL : +886-3-5508137

FAX : +886-3-5508131

sales@atop.com.tw

http : //www.atop.com.tw

Design and specification are subjected to change without notice.

All product names referenced herein are registered trademarks of their respective companies.

DA_AW5500_E : V4_170628